


# CORPORATE SOLUTIONS

## SMALL CONFERENCE ROOM KIT

### CONF-2C-KIT-EU

APPLICATION DIAGRAM

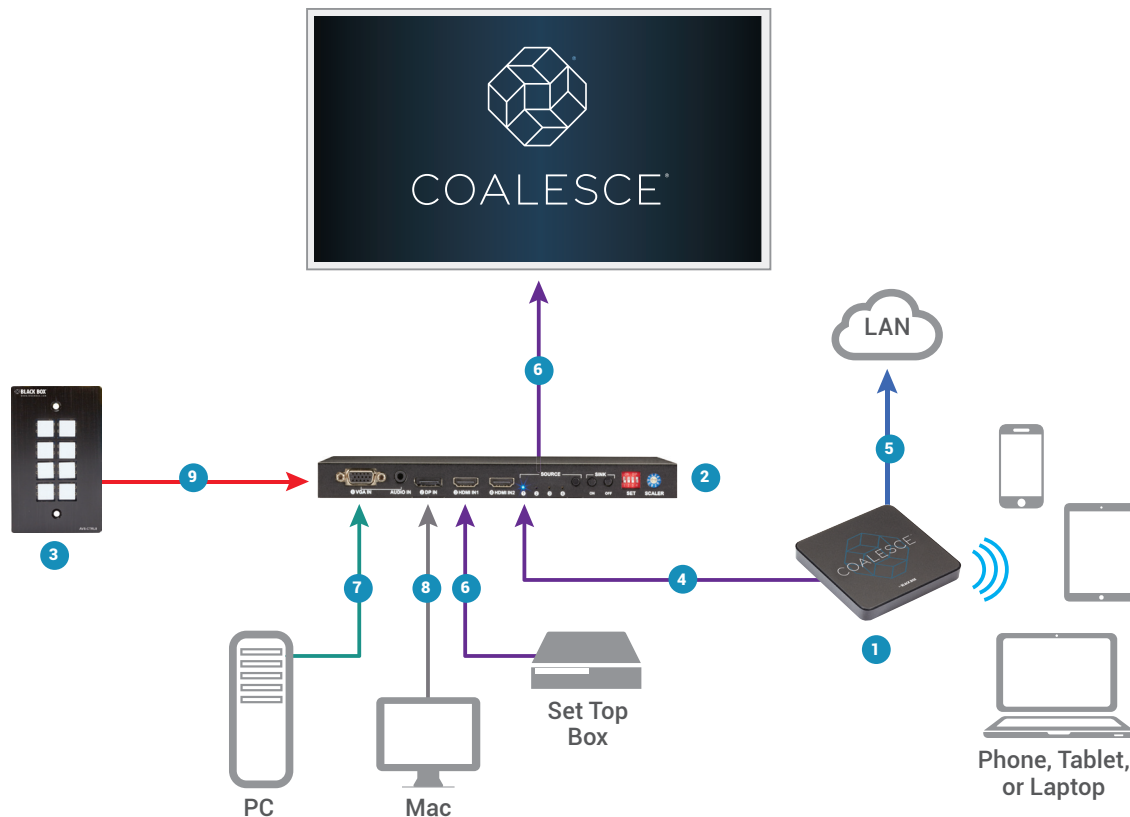

KIT COMPONENTS

- |                                     |  |   |
|-------------------------------------|--|---|
| 1 Coalescence™ Collaboration System | 5 GigaBase® 3 – CAT5e Lockable Patch Cable | 9 Bulk Standard RS-232 Cable                  |
| 2 4 x 1 Presentation Switcher       | 6 High-Speed HDMI Cable                    | 10 Free Pre-Configuration                     |
| 3 Wallplate Control Panel, 8-Button | 7 VGA Video Cable                          | ► For full specifications, see table on back. |
| 4 Slimline High-Speed HDMI Cable    | 8 DisplayPort Cable                        |   |

## DESCRIPTION

Create a technologically modern and integrated meeting space where typically up to 10 people congregate to share ideas and collaborate. Kit includes everything you need including wireless collaboration system, presentation switcher, a control panel, and even cables. **The kit comes fully pre-configured with standard or even individual settings. No programming knowledge is required.**

## CHALLENGE

Today's workplaces need to support easy-to-use technology so the focus can be on collaboration and productivity rather than managing the equipment.

## SOLUTION

Black Box's wireless collaboration system, Coalescence, enables users to wirelessly share content from their PC or mobile devices to the display. To address multi-use rooms with multiple inputs, the presentation switcher and sleek wallplate control panel enable easy and seamless switching from any wired source. Black Box's switcher mounts easily under a table and offers built-in scaling and optional HDBaseT extension for outputs. The control panel is preprogrammed and enables users to select sources, turn a display on or off, or mute audio.



# SMALL CONFERENCE ROOM KIT: CONF-2C-KIT-EU

| Product   | Individual Part #  | Inputs   | Outputs  | Benefits  |
|---|--------------------|--|--|---|
| 1 Coalesce Collaboration System                   | WC-COA-I           | Unlimited (Wireless)                                       | (1) HDMI   | Wirelessly connect, share, and control unlimited content from any device with unlimited users. Compact device fits behind displays.   |
| 2 4 x 1 Presentation Switcher                     | AVSC-0401H         | (1) DisplayPort<br>(2) VGA<br>(2) HDMI<br>(1) Analog audio | (1) HDBaseT – RJ-45<br>(1) HDMI (shared)<br>(1) RS-232<br>(1) Analog audio | Connect legacy analog video sources and new digital sources including HDMI and DisplayPort to the same system and extend the signal to a remote display. RS-232 and relay contact connections for control and management. Tally output for status indication. |
| 3 Wallplate Control Panel 8-Button, Table Top Box | AVS-CTRL8, WP-T1GB | —  | (3) RS-232 (1 and 2 shared w/ IR)<br>(1) RS-485<br>(3) IR<br>(2) Relay     | Control AV equipment with RS-232, RS-485, IR, or relay control from push buttons. Turn a display on/off, select channels on a TV, or switch inputs. Includes IR emitter cable. The panel is coming mounted into a single-gang Table Top Box.                  |
| 4 Slimline High-Speed HDMI Cable                  | VCS-HDMI-001M      | —  | —  | Super flexible, ultra-thin cable, 1 m, for easier handling and installation. Included with Coalesce.  |
| 5 GigaBase 3 CAT5e Lockable Patch Cable           | C5EPC70-BK-06      | —  | —  | Premium, lockable cable, 1.8 m, for a network connection.   |
| 6 High-Speed HDMI Cable                           | VCB-HDMI-002M      | —  | —  | (2) premium high-speed HDMI cables, 2 m, for connecting PCs, set-top boxes, and other HDMI equipment.   |
| 7 VGA Video Cable                                 | EVNPS06B-0010-MM   | —  | —  | A premium cable (3 m) for connecting an older PC with a VGA connector to the Presentation Switcher.   |
| 8 DisplayPort Cable                               | VCB-DP-0006-MM     | —  | —  | Transmit both digital video and audio in one cable, 1.8 m.  |
| 9 Bulk Standard RS-232 Cable                      | ECN04A-0050        | —  | —  | Standard RS-232 cable, 15.2 m, for connecting the Wallplate Control Panel to the Presentation Switcher.   |
| 10 Free Pre-Configuration                         | —                  | —  | —  | With a fully pre-configured, labeled panel with standard or even individual settings, the kit is ready to work.   |

